


- ★ Robust Aluminium body with Single Color Temperature
- ★ No mercury or other hazardous materials
- ★ Built with Quality Driver and 5630LED Chip
- ★ 30,000 hours life with 3 years warranty
- ★ Emergency version available
- ★ Can be wall mounted and ceiling mounted
- ★ PC Lens with high lumen output
- ★ IP65 & IK08 with black finish



QUANTUM

Applications: Indoor & Outdoor

Specifications

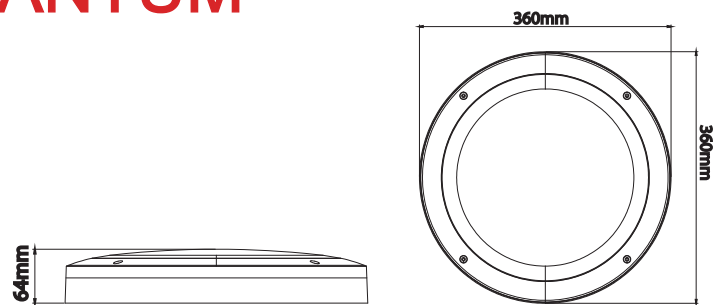

Replaces			
Part Code	BQU18WDICASTBULKBLK	BQU18WDICASTBULKEMBLK	BQU18WDICASTBULKEYEBLK
Trade Price			

Luminescence	Light colour	4000K	4000K	4000K
	Ra, Consistency			
	Luminous flux	1,300lm	1,300lm	800lm
	Beam angle, light intensity	120 Degree	120 Degree	120 Degree
	Accent Lighting	Yes	Yes	Yes
	Warm up time	Instant	Instant	Instant
	Dimmable	No	No	No

Technical	Power input (50-60Hz AC)			
	Power factor & Current	>0.9	>0.9	>0.9
	Lamp type	5630	5630	5630
	Fire rated	No	No	No
	Working temperature	-25-40 C	-25-40 C	-25-40 C
	Construction	Aluminum & PC	Aluminum & PC	Aluminum & PC
	IP & IK rating	IP65 & IK08	IP65 & IK08	IP65 & IK08

Efficiency	Energy Efficiency Label	A+	A+	A+
	EC(Energy consumption)	18KWH/1000H	18KWH/1000H	18KWH/1000H
	Lifetime	30000H	30000H	30000H
	Building Regs - Part L	Yes	Yes	Yes
	Warranty & LMF at EoL	3 Years, 50%	3 Years, 50%	3 Years, 50%
	Switching cycles	10,000X	10,000X	10,000X

This document is not contractual and the equipment specification may be modified at any time without prior notice.

